


aya

EasyGo

Infant Carrier

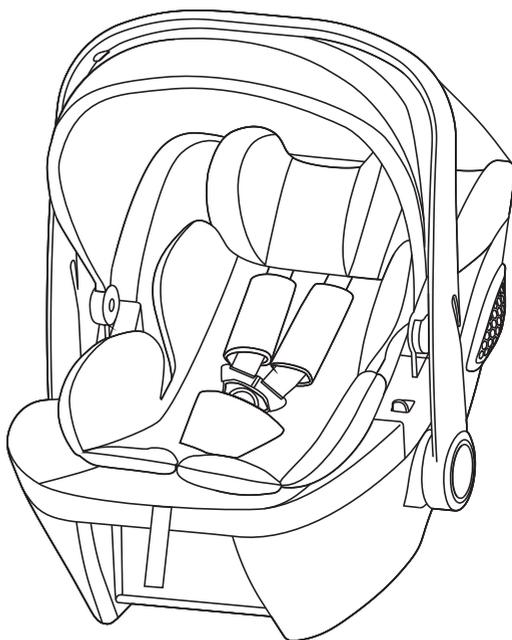

Notice

This car seat is suitable for babies 0–15 months in age or 40–87cm in height.

If in doubt, contact hello@ayababy.co.uk

IMPORTANT! READ CAREFULLY AND KEEP FOR FUTURE REFERENCE.

Thanks for purchasing our infant car seat, we hope this product can bring you safe journey and happy life. To ensure the full protection for your child, please follow the description in this instruction manual to use and install the car seat properly, if you have any question about the use and instalment of this seat, please consult our Customer Services Department or the retailer. Please take time to read this instruction manual and familiarise yourself with the seat before use.

Contents

Important Information	1
Warnings	2
Product Overview	4
Functions	5
Adjusting the Carrying Handle	5
Adjusting the Harness and Headrest	5
Adjusting the Sun Canopy	6
Securing Your Child Into the Car Seat	7
Car Seat Installation	8
Use with Harness & Vehicle Belt	8
Removal of Infant Carrier from Use with Harness & Vehicle Belt	9
Use with ISOFIX Base & Support Leg	10
Installing Infant Carrier on ISOFIX Base	12
Removal of Infant Carrier from Use with ISOFIX Base	13
Care and Maintenance	14
Warranty	16

Important Information

The size range of this infant car seat: 40–87cm or age: 0–15 months, weight: approx 0–13kg. Please follow the instructions in this manual carefully, failure to follow the instructions may affect your child’s safety, the manufacturer is not responsible for the incorrect use.

Notice

This is an i Size Enhanced Child Restraint System. It is approved according to UN Regulation No 129 for use in i Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users’ manual.

If in doubt consult either the child restraint manufacturer or the retailer.

Seat Facing	Size Range	Occupant Mass	ISOFIX	Installation	Category
Rearward Facing	40–87cm	0–13kg (0–15M)	With ISOFIX Base	Adult 3-point belt or used with ISOFIX Base	Universal Belted


Warnings

- ⚠ Please ensure that the Enhanced Child Restraint System is completely installed and fixed correctly, the rigid items and plastic parts of an Enhanced Child Restraint System shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- ⚠ **WARNING!** For rearward facing Enhanced Child Restraint Systems, not to use them in seating positions where there is an active frontal air bag installed.
- ⚠ **IMPORTANT** - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 MONTHS (Refer to instruction).
- ⚠ Ensure that any straps holding the restraint to the vehicle should be tight, that any support-leg should be in contact with the vehicle floor, that any straps or impact shields restraining the child should be adjusted to the child's body, and that straps should not be twisted.
- ⚠ Ensure that any lap strap is worn low down, and that any impact shield installed properly, so that the pelvis is firmly engaged, shall be stressed.
- ⚠ The device should be replaced when it has been subject to violent stresses in an accident.
- ⚠ **WARNING!** It is dangerous to make any alterations or additions to the device without the approval of the Type Approval Authority, and it is dangerous of not following closely the installation instructions provided by the child restraint manufacturer.
- ⚠ When the chair is not provided with a textile cover, the chair should be kept away from sunlight, otherwise it may be too hot for the child's skin.
- ⚠ Ensure that children are not left in their Enhanced Child Restraint System unattended.
- ⚠ Ensure that any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured. Please don't put heavy stuff in the car or the Enhanced Child Restraint System, it could cause injury in the accident.
- ⚠ Please take the child car seat away from the corrosion.
- ⚠ The Enhanced Child Restraint System shall not be used without the cover.

- ⚠ The Enhanced Child Restraint System cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
- ⚠ Please ensure that the adult safety-belt buckle relative to the main load bearing contact points on the restraint. The user shall be advised to contact the child restraint manufacturer if in doubt about this point.
- ⚠ Please not to use any load bearing contact points other than those described in the instructions and marked in the child restraint.
- ⚠ For an “i-Size Enhanced Child Restraint System”, the user shall also be referred to the vehicle manufacturer’s handbook.
- ⚠ Always ensure that the child car seat is securely fastened, even when unoccupied, a loose seat can cause injuries in the event of a collision.
- ⚠ It is most important that the instruction manual should be retained on the child restraint for its life period.
- ⚠ Please buy the product from the decent sales channel, the manufacturer don’t guarantee the quality of second hand product.
- ⚠ The illustrations in this manual are for reference only, and may differ slightly from your seat model.

Installation Notes



⚠ WARNING	
Please do not use forward facing before the child’s age exceeds 15 months. Please do not to use any load bearing contact points other than those described in the instructions and marked in the child restraint.(Refer to instructions)	
	Against the direction of travel Size range 40-87cm

Fitting method of the child car seat:	
Size range 40-87cm: fit with the 3-Point vehicle belt.	
	<p>Ⓜ1 Can not be used in the passenger seat with the airbag activated.</p> <p>Ⓜ2 Only suitable for seats with a 3 point vehicle belt.</p>
✔ Applicable ✘ Not Applicable	

⚠ AIRBAG		
		
Never use in seating positions where an active frontal airbag installed		

	0-15 M	Never use with a 2-point lap belt
		
		
		✔ OK ✘ NO

Product Overview



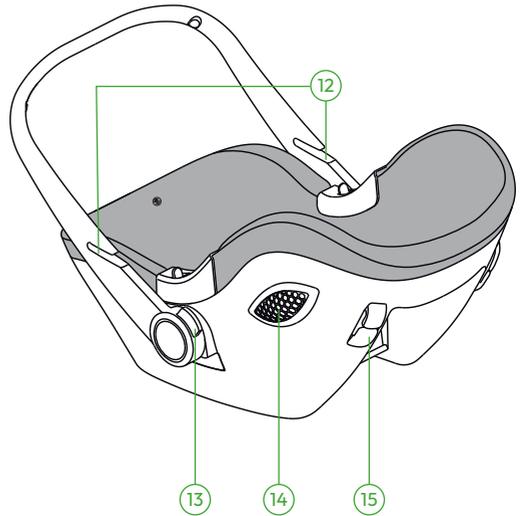
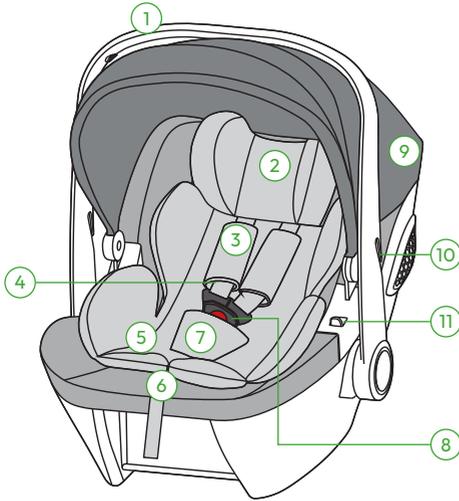


1. Carry Handle
2. Adjustable Headrest
3. Shoulder Pads (Removable)
4. Safety Harness
5. Newborn Insert (Removable)
6. Harness Adjustment Button and Strap
7. Buckle Pad
8. Harness Buckle
9. Canopy
10. Guide for Belting Seat
11. Pushchair Release Button
12. Handle Belt Guide
13. Carry Handle Adjustment Buttons (One Per Side)
14. Side Impact Protection
15. Belt Guide

Functions

Adjusting the Carrying Handle



1. Press the left and right button (01) simultaneously to adjust the carrying handle (02), then rotate the carrying handle forward or rearward while pressing the button, until it automatically locks in place in the desired position.
2. The carrying handle can be locked in four positions:
 - A. vehicle position
 - B. carrying position
 - C. for putting your baby inside
 - D. for setting the infant car seat down safely on a level surface outside the vehicle.

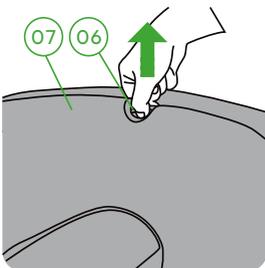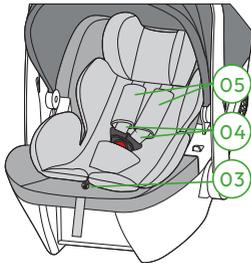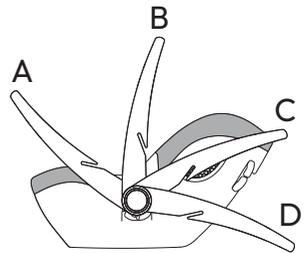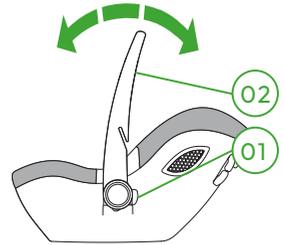

Adjusting the Harness and Headrest

1. Press down on the centre adjuster (03) and pull the shoulder belts (04) towards you. Do not pull on the shoulder pads (05), release the harness as far as it will go.
2. Pull upwards on the adjusting ring (06), whilst pulling up or pushing down the headrest (07) to the required position. The headrest (07) should be positioned so that the shoulder belts (04) fit level with the child's shoulders.
3. It is important that to adjust the headrest (07) correctly to protect the child safety. The height of headrest (07) is to make the shoulder belts (04) to be same level with the shoulder of child.

NOTE: The shoulder belts (04) must not run behind the back of the child or at ear height or above the ears.

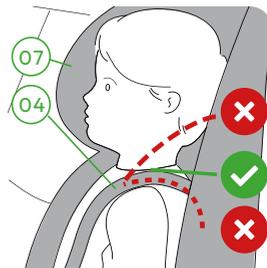


Adjusting the Sun Canopy


The sun canopy can be adjusted at multi-position, to fold up or unfold the sun canopy, please push back or pull gradually on the brim of cover, the sun canopy will stop automatically in the desired position.

Securing Your Child Into the Car Seat


1. Press down on the centre adjuster (03) and pull the shoulder belts (04) towards you, Do not pull on the shoulder pads (05), release the harness as far as it will go and unlock the Y-shape belt buckle (08) or the harness belt buckle.

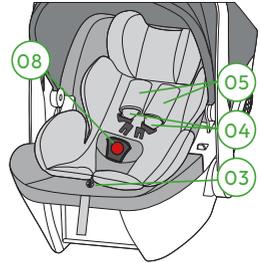

2. Place your child in the infant car seat, ensure that your child's back is lying flat against the backrest of the infant car seat, guide the two buckle latches (09) together and insert to the buckle (08), it will make sound "click" when it locked well.

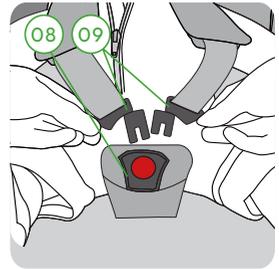

3. Follow up with the section "3.2 Adjusting the harness and headrest" to adjust the headrest fit with your child so that the shoulder belts fit level with the child's shoulders.

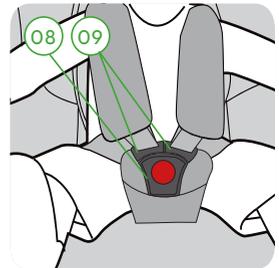

4. Pull out the adjuster strap (10) until the harness lies flat and is close against your child's body.

NOTE: Ensure that all the straps are not twisted at any point, the shoulder belts must not run behind the back of the child or at ear height or above the ears.




Car Seat Installation

Use with Harness & Vehicle Belt

1. Please follow up with section “Adjusting the Carrying Handle” to adjust the carrying handle to “A” position, place the infant car seat facing the rear of the vehicle on the vehicle seat against the direction of travel.



2. Pull out the vehicle seat belt as much as possible, then insert the lap belt section (A) through both of handle belt guides (12), and fasten the vehicle seat belt buckle (B), Insert the diagonal belt section (C) through both of belt guide rings (15) of the infant car seat, pull tight the vehicle seat belt and the infant car seat to remove any slack, ensuring that no part of the vehicle seat belt is twisted.

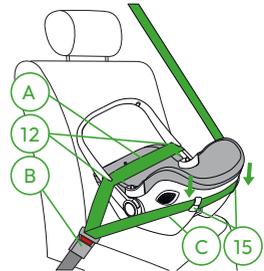

3. Please follow up with section “Securing Your Child Into the Car Seat”.



Notice


For your child’s safety, ensure that the following checks are carried out before every journey:

- Ensure the infant car seat is on the vehicle seat facing the rear of the vehicle against the direction of travel.
- Ensure the lap belt section (11) through both of handle belt guides (12).

- Ensure the diagonal belt section (15) through both of belt guide rings (16) of the infant car seat.
- Ensure the vehicle seat belt buckle (13) is fastened.
- Ensure the shoulder belts (04) to be same level with the shoulder of child, each strap shall not be twisted.
- Ensure each strap of the child restraint system connected to the vehicle shall be fastened, and the strap shall not be twisted.


Removal of Infant Carrier from Use with Harness & Vehicle Belt

Undo buckle and safely remove the belt from the car seat.

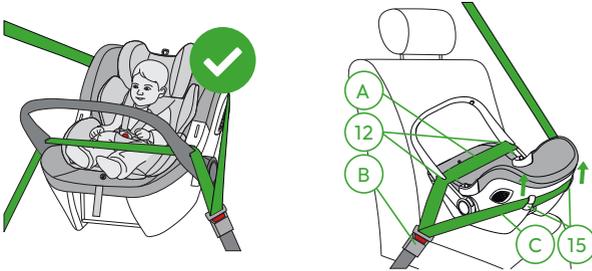


Use with ISOFIX Base & Support Leg

1. If your car is not equipped with the ISOFIX guide socket please insert the guide socket (18) into the ISOFIX anchor (17).
 - **TIP:** ISOFIX anchors are located between the backrest and seat cushion.

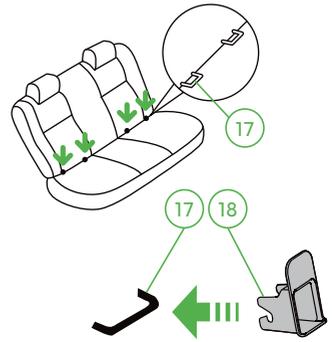


2. Press the second button (20) and ISOFIX release button (19) of the base (21), push the ISOFIX rearward to the last position till hear “click”, and rotate out the support leg (22).

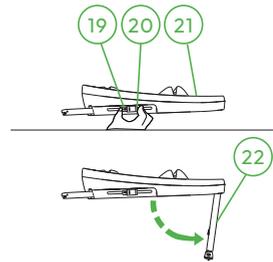


3. Place the infant car seat on the vehicle seat facing the rear of the vehicle against the direction of travel.

4. Insert the ISOFIX connectors (23) into the guide socket (18) till an audible click is heard and the indicators (24) are completely green.


- **CAUTION!** The ISOFIX connectors (23) are secured only when both indicators (24) are completely green.

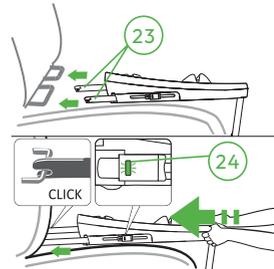


5. Push the base back until it attaches against the backrest of vehicle seat, and try to pull out the base to confirm it locked well.

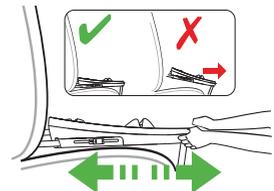


- Please check the interior floor (25) of vehicle under the support leg, there should not be any other than the one recommended by the manufacturer, otherwise it will effect the safety of using the support leg. If in doubt consult either the child car seat manufacture or the retailers.

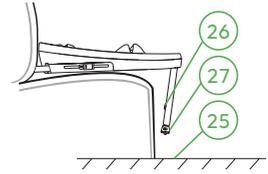

- Press the button (26) and release the lower part of support leg till the support leg foot (27) contacted the vehicle floor (25).

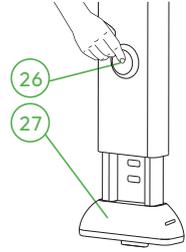


- Ensure the indicators (28) are completely green, then release the button (26) and confirm that it is fully reset to the hole position and locked.



- When the support leg foot (27) is fully contacts the vehicle floor (25) but the support leg button (26) did not reset to the position please slightly lift the base and release one more position to make the button (26) is fully reset, then drop the base and confirm the support leg indicators (28) completely turn green.

Installing Infant Carrier on ISOFIX Base

1. Install the infant carrier (29) to the base (21) till an audible click is heard and the indicator (30) is completely green.

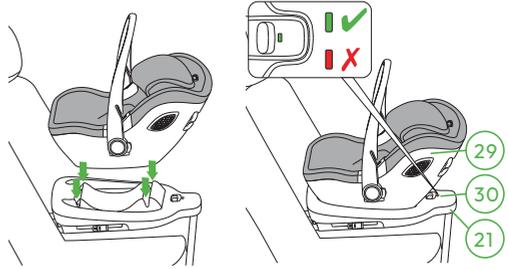

2. Please follow up with section “Securing Your Child Into the Car Seat”.






Notice: For your child’s safety, ensure that the following checks are carried out before every journey:

- Ensure the ISOFIX connectors are securely engaged in the anchors and the indicators are both completely green.
- Ensure the infant car seat is placed up against the backrest of the vehicle seat.
- Ensure the indicator on the base is completely green.
- Ensure the support leg button is fully reset and the indicators are completely green.
- Ensure the harness is fitted snugly to the child, the straps are not twisted.
- Ensure the shoulder straps sit in the correct position on the child’s shoulders, and they are not twisted.
- Ensure the harness buckle is properly secured.

Removal of Infant Carrier from Use with ISOFIX Base

1. Press the base button to release and take away the infant carrier
2. Press the second button and ISOFIX release button to release both side of ISOFIX, push the ISOFIX back into the base.
3. Press the support leg button to release and push back the lower part into the upper tube, then fold up the support leg into the base.
4. When the vehicle belt is in use for infant car seat, firstly release the vehicle buckle (13) , then take off the vehicle belt from handle belt guides (12) of the carrying handle and belt guide rings (16) of the infant car seat.

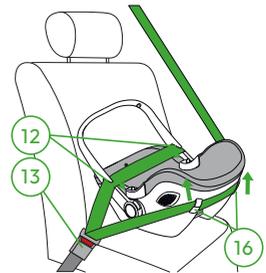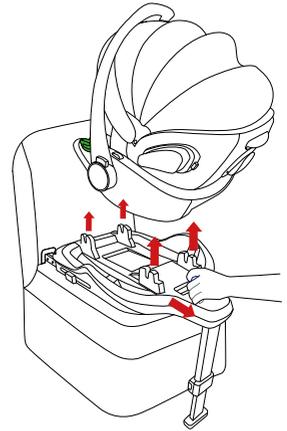

Care and Maintenance

Care for the Harness Buckle

Buckle failure can cause injury, do not use any oil or other lubricants on any part of the buckle. Buckle malfunctions are usually caused by a build-up of debris such as food crumbs or other small particles.


Signs of Buckle Malfunctions as Below

- The buckle latches are slow to release when the red release button is pressed.
- The buckle latches will not lock into the buckle securely.
- The buckle latches are difficult to insert (you will feel resistance).
- The buckle opens only when extreme force is applied.

Cleaning the Seat Cover


Removing the seat cover:

1. Adjust the headrest to the highest position.
2. Removing the cover of headrest firstly.
3. Removing the remaining seat covers.



Refitting the seat cover:

1. Repeat the above steps in the reverse order.
2. Fit and tidy up the seat cover, ensure all covers and trim are replaced correctly.



Cleaning Instruction for the Seat Cover

The seat cover is removable and washable, please refer to below instruction or the content on the fabric care label of the seat cover.



Hand Washing



Do Not
Bleach



Do Not
Iron



Do Not
Dry Clean



Do Not
Tumble Dry

Warranty

- All our products are made from the finest quality materials and are manufactured under the strictest quality controls.
- We guarantee all our products or parts thereof, for a period of one (1) year from the date of purchase against manufacturing defects.
- For warranty purposes we will require proof of purchase. We recommend that the receipt for your product is kept in a safe place.
- This in no way affects your statutory rights.
- For any claim related with the warranty of this product we suggest to contact your retailer who will advise you how to proceed.



www.ayababy.co.uk
hello@ayababy.co.uk

Imported by Millsons of London Ltd. EC1V 2NX
Made in China